DUKERS
Quality Commercial Refrigeration

2 YEARS PARTS & LABOR
PREMIUM
WARRANTY
5 YEAR COMPRESSOR

# GLASS DOOR MERCHANDISER

## DSM-32SR

2-Glass Sliding Door Refrigerator

### TECHNICAL SPECIFICATIONS

Voltage/Frequency
115V/60Hz
Refrigerant
R290
Type of Defrost
Automatic
Interior Finish
White
Exterior Finish
Black
Temperature Range °F
33 ~ 40°F
Compressor Power (HP)
1/3
Nema Config.
NEMA5-15P

### PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.

### HIGH QUALITY & ROBUST DESIGN

DUKERS
Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com

# DETAILS & SPECIFICATIONS

## DSM-32SR

Front View

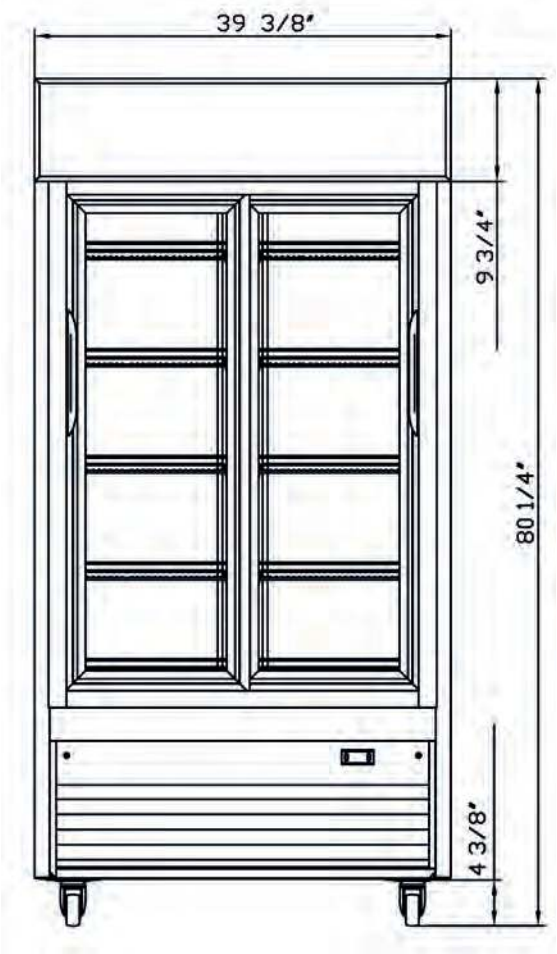


Side View

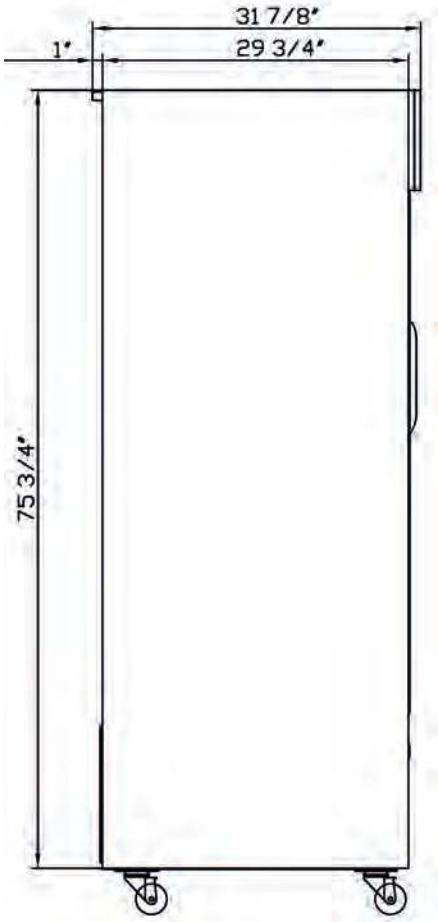


| MODEL DSM-32SR | |
|---|---|
| Rated Voltage | 115V |
| Rated Frequency | 60Hz |
| Total Input Power | 430W |
| Total Current | 3.8A |
| Total Capacity | 33.29 cu ft |
| Climatic Category | 4-5 |
| Protection Type | I |
| Design Pressure High Side | 300 PSIG |
| Design Pressure Low Side | 150 PSIG |
| Insulation Blowing Gas | C-Pentane |
| Refrigerant | R290/5.11 oz |

| MODEL | EXTERNAL DIMENSION WXDXH (INCHES) | PACKAGING DIMENSION WXDXH (INCHES) | PRODUCT NET WEIGHT | # OF SHELVES | 40HQ CONTAINER CERT. |
|---|---|---|---|---|---|
| DSM-32SR | 39 3/8 x 31 7/8 x 80 1/4 | 41 3/8 x 32 7/8 x 82 1/4 | 297 lbs | 10 | 28 |

NATURAL REFRIGERANT

PROUD MEMBER CFESA Commercial Food Equipment Service Association

AQ AutoQuotes

Intertek

Intertek

115/60/1 NEMA-5-15P


DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com